




**SPECIAL RIVETS CORP.**

**恒昭企業股份有限公司**

No. 699 Fuke Road, Situn District, Taichung City 40764, Taiwan  
 TEL: 886-4-24623555 FAX: 886-4-24621777  
 E-mail: srcrivet@ms12.hinet.net http://www.src.com.tw

# Steel Blind Nuts

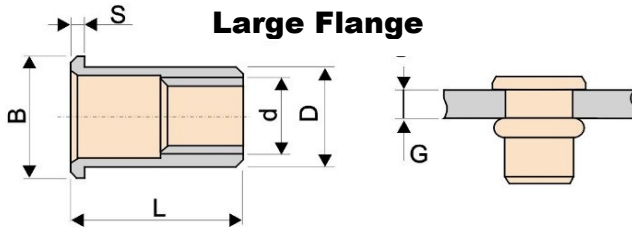

Non-Ribbed



Ribbed

## Flat Head Large Flange Type

Flat Head Blind Nuts provide the most bearing surface for higher torque applications. The larger flange extends above the material in which it is installed and provides a built-in spacer. Choose flat head when high pushout values are required.

NUT CODE	THREAD SIZE d (mm)	NUT DIAMETER D (mm)	HOLE SIZE (-0/+0.1mm)	NUT LENGTH L (mm)	GRIP RANGE G (mm)	HEAD DIAMETER B (mm)	HEAD THICKNESS S (mm)
M4LF	M4 x 0.7	5.9	6	11.6	0.3-2.5	9	0.8
M5LF	M5 x 0.8	6.9	7	13	0.5-3.0	10	1.0
M6LF	M6 x 1.0	8.9	9	16	0.5-4.0	13	1.5
M8LF	M8 x 1.25	10.9	11	18	0.8-4.0	15	1.5
M10LF	M10 x 1.5	12.9	13	21	1.0-5.0	19	1.7

- Perfect for use in metal, fiberglass and rigid plastic previously too thin for tapped threads
- Provide a neat appearance after installation
- Once in place, the internal threads are ready for a screw or bolt

### Easy Steps for Installation

**1** Drill hole to correct diameter, thread fastener onto tool mandrel and insert into hole.

**2** Actuate tool to properly set fastener into material.

**3** Complete your fastening operation with a bolt or screw with the proper thread.

**4** The positive riveting action of S.R.C Blind Nuts provide consistent firm fastening. Push-out and shake-loose are virtually eliminated.

Due to continuous development we reserve the right to alter specifications without prior notice.

Factory:  
 SRC METAL (SHANGHAI) CO., LTD.  
 SRC METAL (JIASHAN) CO., LTD.  
<http://www.srcrivet.com>